

### FLUXX®-Dispensing Taps AH 23

The patented FLUXX®-Dispensing Taps for containers and drums are perfectly suitable for the simple, clean and quick decanting of fluids without gurgling. The chamfered outlet spout also fits in narrow threaded necks and allows easy and clean dosing.

### Broad Product Program

FLUXX®-Dispensing Taps are available for all common industrial containers with standardized thread sizes ranging from DIN 45 to DIN 71 and drums with 3/4" or 2" threads.

### Patented Venting System

The outstanding flow properties are based on the patented ventilation system. Thanks to this FLUXX®-Dispensing Taps AH 23 have a high flow rate of >5 L/min.

### No Leaking

FLUXX®-Dispensing Taps are leakproof even with aggressive chemical compounds and strongly creeping fluids.

### Declaration of Conformity

All components used in the production process are uncritically in regards to EG food regulatory guidelines 2002/72 and the German „Lebensmittel- und Futtermittel Gesetzbuch (LFGB)“.



### Example




### Benefits

- **Fast**, clean dispensing without gurgling
- **Available** for all common thread sizes
- **Outlet** spout fits into DIN 28 bottle necks and allows easy dosing even in smaller containers
- **Chamfered** tip for clean dispensing
- **High** flow rate of more than 5 L/min
- **High** chemical resistance
- **All** components are physiologically harmless

### Applications

Dispensing of

- Chemicals
- Cleaners
- Disinfectants
- Liquid food
- Lubricants
- Water

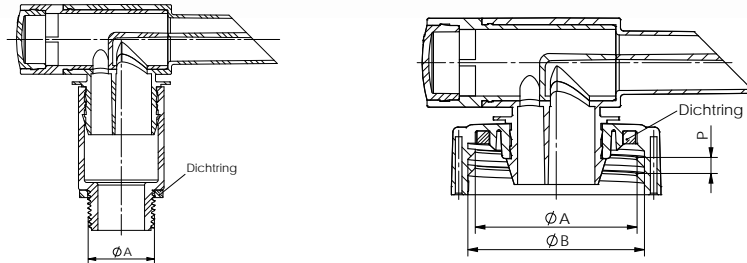

Description	Illustration	Item Number	Pack Quantity	Dimensions
<b>AH 23/61</b> for DIN 61 Thread for 15-60 liter containers		408 120 black 408 124 - red	200 pcs.	Ø A 55,6 mm / Ø B 60,5 mm P = 6 mm (Pitch)
<b>AH 23/51</b> for DIN 51 Thread for 5-30 liter containers		407 120 - black 407 124 - red	250 pcs.	Ø A 50,2 mm / Ø B 54,8 mm P = 5 mm (Pitch)
<b>AH 23/50</b> for DIN 50 Thread for 5-20 liter containers		410 220 - black 410 224 - red	275 pcs.	Ø A 46,1 mm / Ø B 50,1 mm P = 4 mm (Pitch)
<b>AH 23/45</b> for DIN 45 Thread for 2-10 liter containers		410 120 - black 410 124 - red	350 pcs.	Ø A 41,1 mm / Ø B 45,1 mm P = 4 mm (Pitch)
<b>AH 23/3/4"</b> on 2" Mauser-Rough-Thread		409 220	175 pcs.	R 3/4" on S 70x6 Mauser-Rough-Thread
<b>AH 23/3/4"</b> on 2" Trisure-Thread for Steel-/Plasticdrums		409 420 - fine 409 320 - rough	175 pcs.	R 3/4" on 2" PPS Fine- or Rough-Thread
<b>AH 23/3/4"</b> with 3/4" External Thread		409 120	250 pcs.	R 3/4" BSP-Thread
<b>AH 23/71</b> for DIN 71 Thread for 30-60 liter containers		410 320 - black	125 pcs.	Ø A 67,0 mm / Ø B 72,3 mm P = 7 mm (Pitch)
<b>Protection Cap</b> available for all AH 23		999 008	--	--

## Material

Housing, cover cap, adapter: Polyethylen (PE)  
Lever, screw cap: Polypropylen (PP)  
EPE-sealing ring: LD-PE foam (Alveocel)

## Colours

Housing: nature  
Lever: red  
Screw cap: red or black  
(other colours on request)

## Chemical Resistance



acids, bases, inorganic salts, alcohols, amines



ester, ketones, aldehydes, aromatic compounds, fuels, fats, oils, ether, paraffin hydrocarbons



oxidising compounds, halogens, halogen alkane



= resistant



= limited resistance



= non-resistant

Please contact us for additional details

## Please note

We can not guarantee comprehensive chemical resistance of specific applications. We recommend testing of actual application prior to use.

Please contact our technical service for any further questions.

CJK Packaging Limited  
Bridgeholme Ind. Est.  
Charley Lane  
Chinley, High Peak  
SK23 6DX

Tel: 01663 750222  
Fax: 01663 750333

Email: sales@cjck.co.uk  
Website: www.cjck.co.uk